



850F2K5E

DATASHEET

[View Part on Verical](#)

Email Us

Sales: sales@verical.com

Support: support@verical.com

Suppliers: [Visit our seller page](#)

Company Address

Arrow Electronics, Inc

7459 S. Lima Street

Englewood, CO 80112-3879

This coversheet was created by Verical, a division of Arrow Electronics, Inc. ("Verical"). The attached document was created by the part supplier, not Verical, and is provided strictly 'as is.' Verical, its subsidiaries, affiliates, employees, and agents make no representations or warranties regarding the attached document and disclaim any liability for the consequences of relying on the information therein. All referenced brands, product names, service names, and trademarks are the property of their respective owners.

89 Series

Metal-Mite® Aluminum Housed Axial Terminal Wirewound, 1% Tolerance



The 89 Series is a high-performance axial type resistor. These molded-construction metal-housed resistors are available in higher power ratings than standard axial resistors and are better suited to withstanding vibration, shock and harsh environmental conditions.

The 89 Series Metal-Mite® resistors are aluminum housed to maintain high stability during operation and to permit secure mounting to chassis surfaces.

The metal housing also provides heat-sinking capabilities.

FEATURES

- High Stability: $\pm 0.5\%$ ΔR
- High power to size ratio
- Metal housing allows chassis mounting and provides heat sink capability

SERIES SPECIFICATIONS

Series	Wattage	Ohms	Voltage
805	5	0.10-25K	210
810	10	0.10-50K	320
825	25	0.010-75K	520
850	50	0.005-100K	1170

Non-Inductive versions available. Insert "N" before tolerance code.
Example: 850NF560

CHARACTERISTICS

Housing	Metal, anodized aluminum
Internal Coating	Silicone
Core	Ceramic
Terminals	Solder-coated axial
Derating	Linearly from 100% @ +25°C to 0% @ +275°C.
Tolerance	$\pm 1\%$ and $\pm 5\%$ (other tolerances available).
Power rating	Rating is based on chassis mounting area and temperature stability. Proper heat sink as follows: 5W and 10W units, 4" x 6" x 2" x .040" Aluminum chassis; 25W units, 5" x 7" x 2" x .040" Aluminum chassis; 50W units, 12" x 12" x .059" Aluminum panel.
Maximum ohmic values	See chart.
Overload	5 times rated wattage for 5 seconds.
Temperature coefficient	Under 1Ω: ± 90 ppm/°C; 1 to 9.99Ω: ± 50 ppm/°C; 10Ω and over: ± 20 ppm/°C.
Dielectric withstanding voltage	5W and 10W rating, 1000 VAC; 25 and 50W ratings, 2250 VAC.


(continued)

89 Series

Metal-Mite® Aluminum Housed Axial Terminal Wirewound, 1% Tolerance

DIMENSIONS

(in./mm)

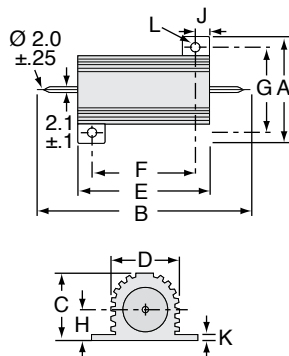

Dimensions have changed
as of August 2015

	A max.	B max.	C max.	D max.	E max.	F ±.3mm	G ±.3mm	H max.	J max.	K max.	L ±.25mm
805	0.65" / 16.5	1.18" / 30.0	0.35" / 8.8	0.33" / 8.5	0.63" / 15.9	0.44" / 11.3	0.49" / 12.4	0.18" / 4.5	0.09" / 2.4	0.07" / 1.8	0.09" / 2.4
810	0.83" / 21.0	1.44" / 36.5	0.43" / 11.0	0.44" / 11.2	0.78" / 19.9	0.56" / 14.3	0.63" / 15.9	0.22" / 5.5	0.11" / 2.8	0.07" / 1.8	0.09" / 2.4
825	1.10" / 28.0	2.01" / 51.0	0.58" / 14.8	0.56" / 14.2	1.07" / 27.3	0.72" / 18.3	0.78" / 19.8	0.30" / 7.7	0.20" / 5.2	0.10" / 2.6	0.13" / 3.2
850	1.10" / 28.0	2.85" / 72.5	0.58" / 14.8	0.56" / 14.2	1.93" / 49.1	1.56" / 39.7	0.84" / 21.4	0.33" / 8.4	0.20" / 5.2	0.10" / 2.6	0.13" / 3.2

ORDERING INFORMATION

Ohmic value	Part No. Prefix Suffix	Wattage 5 10 25 50
0.005	R005	✓ ✓
0.010	R010	✓ ✓
0.025	R025	✓ ✓
0.1	R10	✓ ✓
0.3	R30	✓ ✓
0.5	R50	✓ ✓
0.7	R70	✓ ✓
1.0	1R0	✓ ✓
1.5	1R5	✓ ✓
2.0	2R0	✓ ✓
3.0	3R0	✓ ✓
4.0	4R0	✓ ✓
5.0	5R0	✓ ✓
10.0	10R	✓ ✓
15.0	15R	✓ ✓
Ohmic value	Part No. Prefix Suffix	Wattage 5 10 25 50
20	20R	✓ ✓
25	25R	✓ ✓
30	30R	✓ ✓
40	40R	✓ ✓
50	50R	✓ ✓
75	75R	✓ ✓
100	100	✓ ✓
150	150	✓ ✓
200	200	✓ ✓
250	250	✓ ✓
300	300	✓ ✓
400	400	✓ ✓
500	500	✓ ✓
750	750	✓ ✓
1,000	1K0	✓ ✓
Ohmic value	Part No. Prefix Suffix	Wattage 5 10 25 50
1,500	1K5	✓ ✓
2,000	2K0	✓ ✓
2,500	2K5	✓ ✓
3,000	3K0	✓ ✓
3,500	3K5	✓ ✓
4,000	4K0	✓ ✓
4,500	4K5	✓ ✓
5,000	5K0	✓ ✓
6,000	6K0	✓ ✓
10,000	10K	✓ ✓
15,000	15K	✓ ✓
20,000	20K	✓ ✓
25,000	25K	✓ ✓
50,000	50K	✓ ✓
75,000	75K	✓ ✓
100,000	100K	✓ ✓

Non-Inductive Winding
Optional (blank = std. winding) RoHS Compliant

805 N F 5 R 0 E

Series: 805 = 5 Watt, 810 = 10 watt, 825 = 25 watt, 850 = 50 watt
Tolerance: F = 1%, J = 5%
Ohms: R005 = 0.005Ω, R10 = 0.1Ω, 1R0 = 1.0Ω, 250 = 250Ω, 1K0 = 1,000Ω, 1K5 = 1,500Ω, 25K = 25,000Ω

✓ = Standard values

✦ = Non-standard values subject to minimum handling charge per item

Shaded values involve very fine resistance wire and should not be used in critical applications without burn-in and/or thermal cycling.

As of September 2006,
the 89 Series is no longer
offered as Mil. Spec.